





Tipo - UC-300 - Cargas Normais

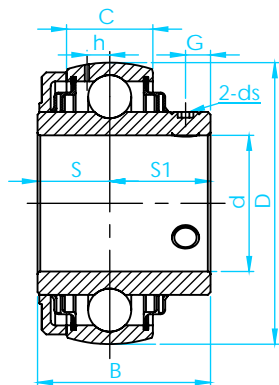

Vedação F



Com Defletor Metálico



Vedação R3

BRM

Ø do Eixo (d)		Rolamento	D mm	B mm	C mm	S mm	S1 mm	G mm	h mm	ds mm	Capacidade de Carga	
mm	Pol.										Dinâmica C (N)	Estática Co (N)
25	7/8	UC305-14	62	38	21	15	23	6	6,2	M6X1	22360	11500
	15/16	UC305-15										
	1	UC305										
	1	UC305-16										
30	1 1/8	UC306-18	72	43	24	17	26	6	6,5	M6X1	27000	15200
	1 3/16	UC306										
	1 3/16	UC306-19										
35	1 1/4	UC307-20	80	48	25	19	29	8	7,2	M8X1	33500	19200
	1 5/16	UC307-21										
	1 3/8	UC307-22										
	1 3/8	UC307										
40	1 1/2	UC308-24	90	52	28	19	33	10	8,5	M10X1,25	40560	24000
	1 9/16	UC308-25										
	1 9/16	UC308										
45	1 5/8	UC309-26	100	57	30	22	35	10	9	M10X1,25	53000	31800
	1 11/16	UC309-27										
	1 3/4	UC309-28										
	1 3/4	UC309										
50	1 7/8	UC310-30	110	57	30	22	35	10	9	M10X1,25	61750	37800
	1 15/16	UC310-31										
	1 15/16	UC310										
55	2	UC311-32	120	66	34	25	41	12	10,6	M12X1,25	71500	44800
	2 1/8	UC311-34										
	2 3/16	UC311										
	2 3/16	UC311-35										
60	2 1/4	UC312-36	130	71	36	26	45	12	11,3	M12X1,25	81600	51800
	2 3/8	UC312										
	2 7/16	UC312-38										
	2 7/16	UC312-39										
65	2 1/2	UC313-40 UC313	140	75	38	30	45	12	12,1	M12X1,25	93860	60500
70	2 3/4	UC314-44 UC314	150	78	40	31	47	12	12,8	M12X1,25	104260	68000
75	3	UC315 UC315-48	160	82	42	32	50	14	13,5	M14X1,5	113360	76800
80		UC316	170	86	44	34	52	14	14,5	M14X1,5	122850	86500
85	3 1/4	UC317-52 UG317	180	96	46	40	56	16	15,5	M16X1,5	132600	96500
90	3 1/4	UC318-56 UC318	190	96	48	40	56,0	16	16,5	M16X1,5	143000	108000
95	3 3/4	UC319 UC319-60	200	103	50	41	62	18	16,7	M16X1,5	156000	122000
100	4	UC320 UC320-64	215	108	54	42	66	18	19	M18X1,5	171600	140000
110	-	UC322	240	117	60	46	71	18	21	M18X1,5	158000	178000
120	-	UC324	260	126	64	51	75	18	22	M18X1,5	175000	208000
130	-	UC326	280	135	68	54	81	20	23	M20X1,5	195000	242000
140	-	UC328	300	145	72	59	86	20	25	M20X1,5	212000	272000