



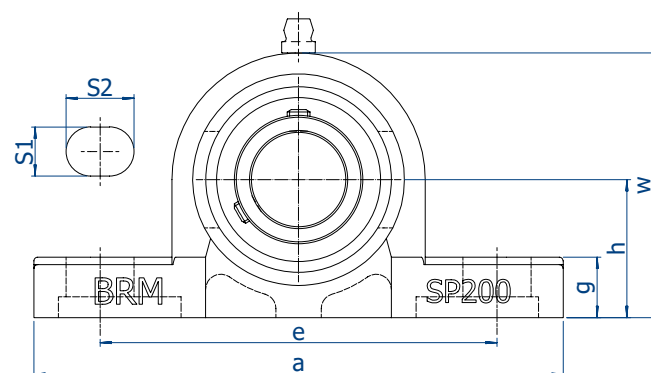

BRM

SP 200

Mancal em **INOX**
Tipo **APOIO**
Serviço **NRMAL**




Ø eixo		Caixa	Dimensões (mm)										Paraf.
mm	pol		h	a	e	b	s1	s2	g	w	t	Z	
20	3/4	SP 204	33,3	126,0	95	38,0	13	19	15	65	2	66	MM10 3/8
25	7/8 1	SP 205	36,5	138,0	105	37,0	13	19	116	70	2	77	M10 3/8
30	1-1/8 1-3/16 1-1/4	SP 206	42,9	163,0	121	47,0	17	21	18	83	2	89	M14 1/2
35	1-1/4 1-3/8 1-7/16	SP 207	47,6	165,0	127	47,0	17	21	19	94	3	90	M14 1/2
40	1-1/2	SP 208	49,2	183,0	137	53,5	17	23	19	100	3	101	M14 1/2
45	1-11/16 1-3/4	SP 209	54,0	188,5	146	53,5	17	23	20	109	3	98	M14 1/2
50	2	SP 210	57,2	203,5	159	59,0	20	25	22	114	3	103	M16 5/8
55	2 2-3/16	SP 211	63,5	217,5	171	59,0	20	25	22	125	4	111	M16 5/8
60	2-7/16	SP 212	69,8	239,0	184	69,0	20	25	25	138	4	119	M16 5/8


BRM




SUC SP200

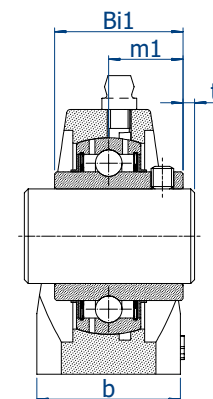


SUC SP200 ECYA
SUC SP200 ECYB

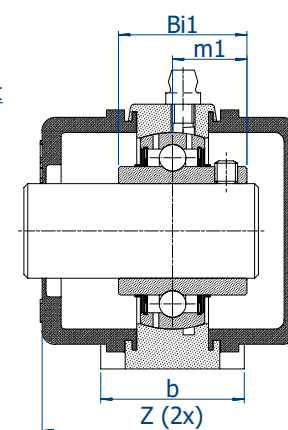

SSB SP200 ECYA+TI
SSB SP200 ECYB+TI

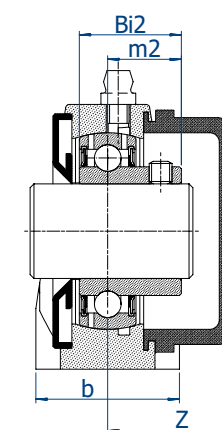

SSA SP200 ECYA+TI
SSA SP200 ECYB+TI

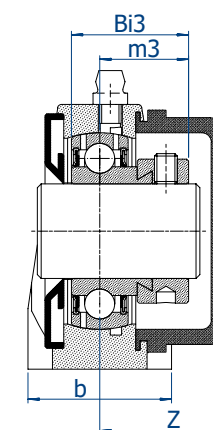



Ø da Pista	Dimensões (mm)						Peso (Kg)		
	SUC 200		SSB 200		SSA 200		SUCSP 200	SSBSP 200	SSASP 200
	Bi1	m1	Bi2	m2	Bi3	m3			
47	31,0	18,3	25,0	18,0	31,0	24,0	0,90	0,85	0,87
52	34,1	19,8	27,0	19,5	31,0	23,5	1,00	0,95	0,97
62	38,1	22,2	30,0	22,0	35,8	27,8	1,40	1,30	1,35
72	42,9	25,4	32,0	23,5	39,0	30,5	1,90	1,80	1,85
80	49,2	30,2	34,0	25,0	43,8	34,8	2,20	2,00	2,10
85	49,2	30,2	36,0	26,5	-	-	2,50	2,20	-
90	51,6	32,6	43,4	32,4	-	-	3,10	3,00	-
100	55,6	33,4	45,0	34,5	-	-	4,00	3,80	-
110	65,1	39,7	49,7	38,7	-	-	5,40	5,25	-



BRM


SF 200

Mancal em INOX
Tipo **FLANGE QUADRADA**
Serviço **NRMAL**

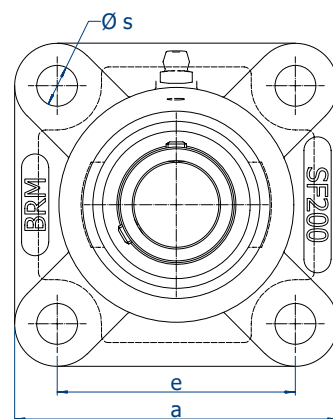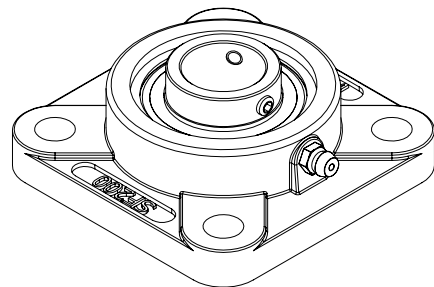

Ø eixo		Caixa	Dimensões (mm)								Paraf.
mm	pol		a	e	i	g	l	Ø s	t	Z	
20	3/4	SF 204	86,0	64	15,0	12,0	25,5	12	2	47	M10 3/8
25	7/8 1	SF 205	94,5	70	16,0	14,0	27,0	12	2	54	M10 3/8
30	1-1/8 1-3/16 1-1/4	SF 206	107,0	83	18,0	14,0	31,0	12	2	62	M10 3/8
35	1-1/4 1-3/8 1-7/16	SF 207	117,0	92	19,0	14,3	34,0	14	3	65	M12 1/2
40	1-1/2	SF 208	130,0	102	21,0	14,3	36,0	16	3	71	M14 1/2
45	1-11/16 1-3/4	SF 209	136,0	105	22,0	14,3	38,0	16	3	71	M14 1/2
50	2	SF 210	142,0	111	22,0	1,1	40,0	16	3	75	M14 1/2
55	2 2-3/16	SF 211	161,0	130	25,0	18,0	43,0	19	4	82	M16 5/8
60	2-7/16	SF 212	174,0	143	29,0	18,0	48,0	19	4	90	M16 5/8

BRM

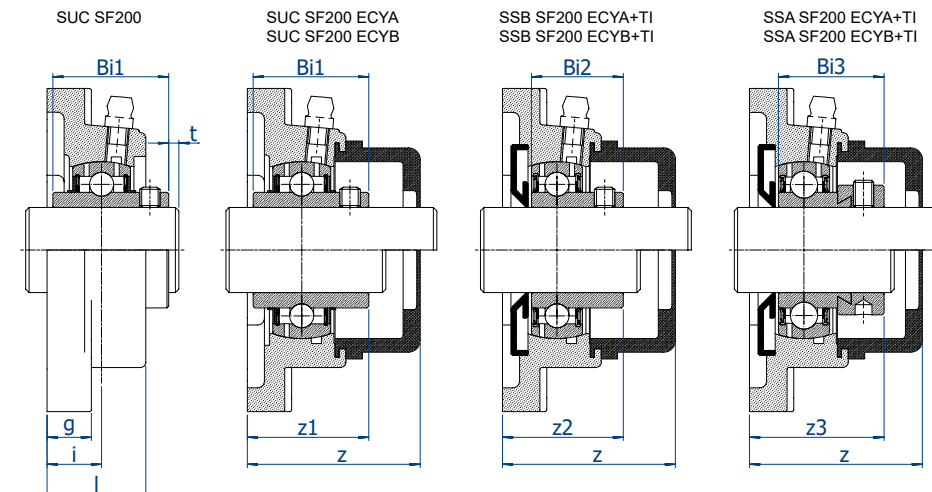



Ø da Pista	Dimensões (mm)						Peso (Kg)		
	SUC 200		SSB 200		SSA 200		SUCSF 200	SSBSF 200	SSASF 200
	z	Bi1	z2	Bi2	z3	Bi3			
47	33,3	31,0	33,0	25,0	39,0	31,0	0,60	0,50	0,55
52	35,8	34,1	35,5	27,0	39,5	31,0	0,80	0,75	0,77
62	40,2	38,1	40,0	30,0	45,8	35,8	1,10	1,00	1,05
72	44,4	42,9	42,5	32,0	49,5	39,0	1,50	1,30	1,40
80	51,2	49,2	46,0	34,0	55,8	43,8	1,90	1,60	1,75
85	52,2	49,2	48,5	36,0	-	-	2,00	1,80	-
90	54,6	51,6	54,4	43,4	-	-	2,40	2,20	-
100	58,4	55,6	59,5	45,0	-	-	3,60	3,50	-
110	68,7	65,1	67,7	49,7	-	-	4,10	4,00	-



BRM


SFL 200

Mancal em **INOX**
Tipo **FLANGE**
Serviço **NRMAL**

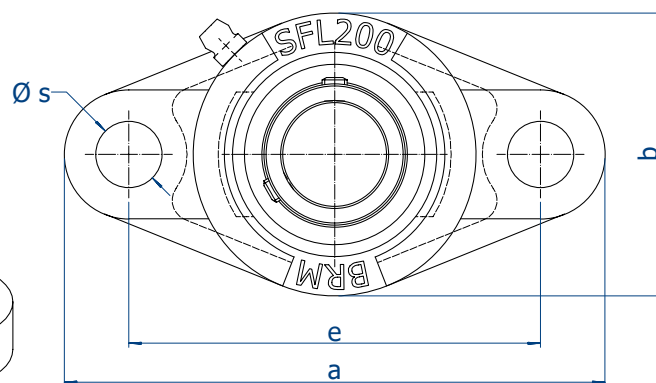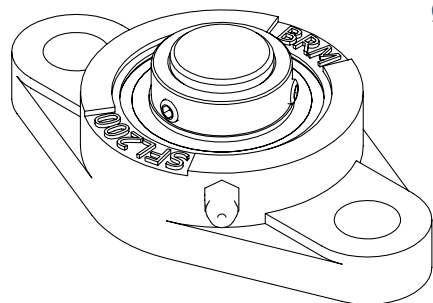

Ø eixo		Caixa	Dimensões (mm)									Paraf.
mm	pol		a	e	i	g	l	Ø s	b	t	Z	
20	3/4	SFL 204	111	90	15,0	11,0	25,5	12	60	2	47	M10 3/8
25	7/8 1	SFL 205	125	99	16,0	13,0	27,0	12	68	2	54	M10 3/8
30	1-1/8 1-3/16 1-1/4	SFL 206	141	117	18,0	13,0	31,0	16	80	2	62	M10 7/16
35	1-1/4 1-3/8 1-7/16	SFL 207	156	130	19,0	14,3	34,0	16	90	3	65	M14 1/2
40	1-1/2	SFL 208	171	144	21,0	14,3	36,0	16	100	3	71	M14 1/2
45	1-11/16 1-3/4	SFL 209	179	148	22,0	14,3	38,0	19	108	3	71	M16 5/8
50	2	SFL 210	789	157	22,0	15,1	40,0	19	115	3	75	M16 5/8
55	2 2-3/16	SFL 211	224	184	25,0	20,0	43,0	19	130	4	82	M16 5/8
60	2-7/16	SFL 212	250	202	29,0	20,0	48,0	23	140	4	89	M20 3/4

BRM

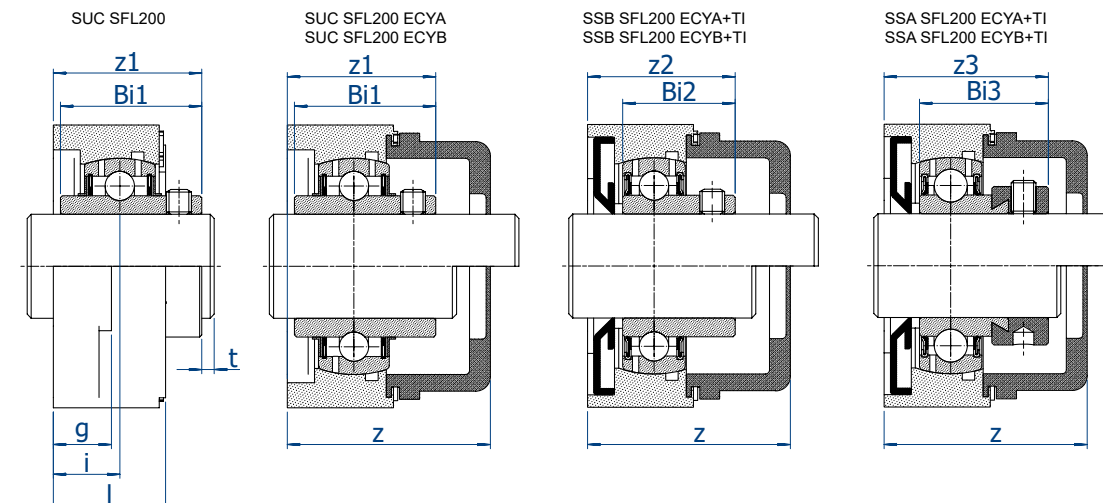


Ø da Pista	Dimensões (mm)						Peso (Kg)		
	SUC 200		SSB 200		SSA 200		SUCSFL 200	SSBSFL 200	SSASFL 200
	z1	Bi1	z2	Bi2	z3	Bi3			
47	33,3	31,0	33,0	25,0	39,0	31,0	0,60	0,50	0,55
52	36,3	34,1	35,5	27,0	39,5	31,0	0,80	0,70	0,75
62	40,2	38,1	40,0	30,0	45,8	35,8	1,10	1,00	1,05
72	44,4	42,9	42,5	32,0	49,5	39,0	1,50	1,35	1,45
80	51,7	49,2	46,0	34,0	55,8	43,8	1,90	1,80	1,85
85	54,2	49,2	48,5	36,0	-	-	2,00	1,90	-
90	57,6	51,6	54,4	43,4	-	-	2,40	2,20	-
100	59,4	55,6	59,5	45,0	-	-	3,60	3,50	-
110	68,7	65,1	67,7	49,7	-	-	4,10	4,00	-




SST 200

Mancal em **INOX**
Tipo **TENSOR**
Serviço **NRMAL**

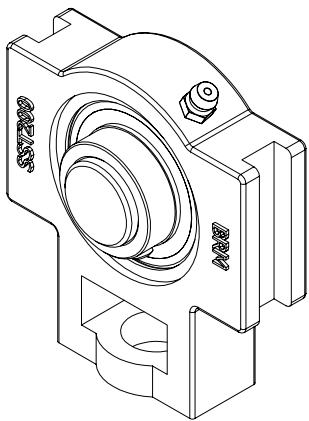


BRM

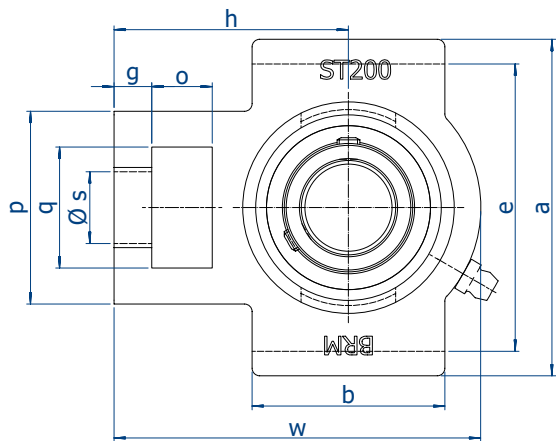

Ø eixo		Caixa	Dimensões (mm)														
mm	pol		o	g	p	q	s	b	k	e	a	w	l	j	h	t	Z
20	3/4	SST 204	16	10	51	32	19	51	12,0	76,0	89	94	21	32	61	2	65
25	7/8 1	SST 205	16	10	51	32	19	51	12,0	76,0	89	97	24	32	62	2	77
30	1-1/8 1-3/16 1-1/4	SST 206	18	10	56	37	22	57	12,0	89,0	102	113	28	37	70	2	91
35	1-1/4 1-3/8 1-7/16	SST 207	18	13	64	37	22	64	12,0	89,0	102	129	30	37	78	3	92
40	1-1/2	SST 208	23	16	83	49	29	83	16,0	102,0	114	144	33	49	88	3	102
45	1-11/16 1-3/4	SST 209	23	16	83	49	29	83	16,0	102,0	117	144	35	49	87	3	100
50	2	SST 210	23	16	83	49	29	86	16,0	102,0	117	149	37	49	90	3	106
55	2 2-3/16	SST 211	25	19	102	64	35	95	22,0	130,0	146	171	38	64	106	4	115
60	2-7/16	SST 212	32	19	102	64	35	102	22,0	13,0	146	194	42	68	119	4	123

BRM

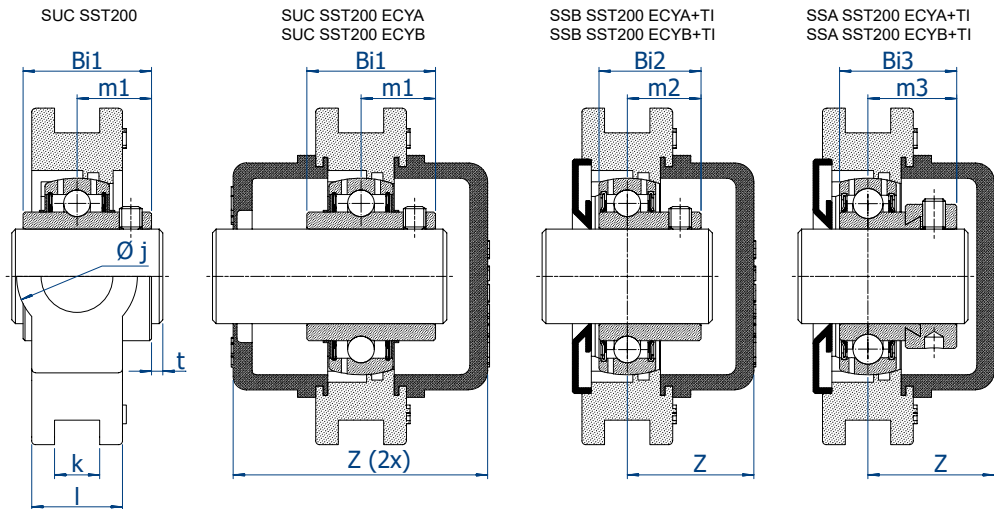

Ø da Pista	Dimensões (mm)						Peso (Kg)		
	SUC 200		SSB 200		SSA 200		SUCSST 200	SSBSST 200	SSASST 200
	Bi1	m1	Bi2	m2	Bi3	m3			
47	31,0	18,3	25,0	18,0	31,0	24,0	0,80	0,70	0,75
52	34,1	19,8	27,0	19,5	31,0	23,5	0,90	0,80	0,85
62	38,1	22,2	30,0	22,0	35,8	27,8	1,30	1,10	1,20
72	42,9	25,4	32,0	23,5	39,0	30,5	1,70	1,50	1,60
80	49,2	30,2	34,0	25,0	43,8	34,8	2,50	2,20	2,35
85	49,2	30,2	36,0	26,5	-	-	2,50	2,20	-
90	51,6	32,6	43,4	32,4	-	-	2,60	2,50	-
100	55,6	33,4	45,0	34,5	-	-	4,20	4,00	-
110	65,1	39,7	49,7	38,7	-	-	5,10	5,00	-