



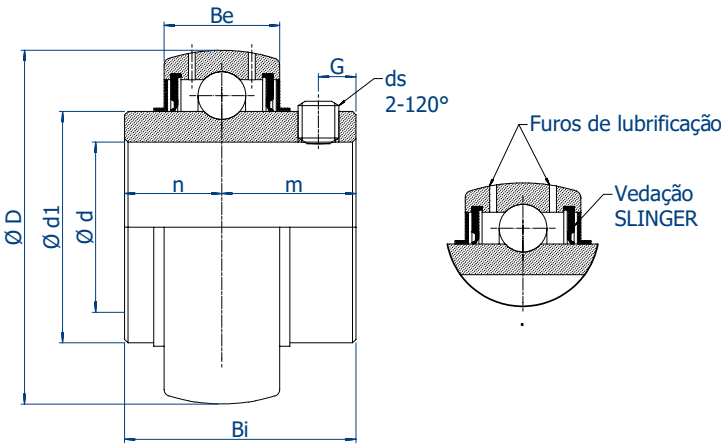

SUC 200

AÇO INOXIDÁVEL
Rolamento **ESFÉRICO**
Fixação por **PARAFUSOS**
Serviço **NORMAL**





Ø Eixo mm pol.	Rolamento	Dimensões (mm)							ds (mm) (UNF)	Carga (Kgf)		Rotação Máxima (rpm) Ajuste h7	Peso (Kg)
		D	d1	Bi	n	m	Be	G		dinâmica Cr	estática Cor		
3/4 20	SUC 204-12 SUC 204	47,0	28,5	31,0	12,7	18,3	16,0	5,0	M6x1 1/4-28	990	665	4800	0,20
20	SUC 204 S	47,0	28,5	29,0	10,7	18,3	17,0	5,0	M6x1 1/4-28	990	665	4800	0,17
7/8 25 1	SUC 205-14 SUC 205 SUC 205-16	52,0	33,4	34,1	14,3	19,7	17,0	5,0	M6x1 1/4-28	7080	788	4000	0,20
25	SUC 205 S	52,0	33,4	31,0	11,2	19,7	17	5,0	M6x1 1/4-28	7080	788	4000	0,18
30 1-3/16 1-1/4	SUC 206 SUC 206-19 SUC 206-20	62,0	40,5	38,1	15,9	22,2	19,0	5,0	M6x1 1/4-28	1500	1120	3400	0,30
1-1/4 1-3/8 35 1-7/16	SUC 207-20 SUC 207-22 SUC 207 SUC 207-23	72,0	47,0	42,9	17,5	25,4	20,0	7,0	M8x1 5/16-24	1980	1520	3000	0,50
35	SUC 207 S	72,0	47,0	39,0	13,6	25,4	20	7,0	M8x1 5/16-24	1980	1520	3000	0,45
1-1/2 40	SUC 208-24 SUC 208	80,0	53,0	49,2	19,0	30,2	21,0	8,0	M8x1 5/16-24	2230	1820	2600	0,65
1-3/4 45	SUC 209-28 SUC 209	85,0	57,0	49,2	19,0	30,2	22,0	8,0	M8x1 5/16-24	2520	2080	2400	0,70
50 2	SUC 210 SUC 210-32	90,0	62,0	51,6	19,0	32,6	24,0	10,0	M10x1,25 3/8-24	2690	2320	2200	0,80
2 55 2-3/16	SUC 211-32 SUC 211 SUC 211-35	100,0	69,0	55,6	22,2	33,4	25,0	10,0	M10x1,25 3/8-24	3330	2920	2000	1,15
60 2-7/16	SUC 212 SUC 212-39	110,0	75,0	65,1	25,4	39,7	27,0	10,5	M10x1,25 3/8-24	4020	3280	1800	1,55
65	SUC 213	120,0	82,0	65,1	25,4	39,7	28,0	12,0	M10x1,25	4390	4000	1700	1,75
70	SUC 214	125,0	86,5	74,6	30,2	44,4	30,0	12,0	M12x1,25	4760	4500	1600	2,00
75	SUC 215	130,0	91,5	77,8	33,3	44,5	30,0	12,0	M12x1,25	5060	4950	1500	2,200

BRM



SSB 200

AÇO INOXIDÁVEL
Rolamento **ESFÉRICO**
Fixação por **PARAFUSOS**
Serviço **LEVE**

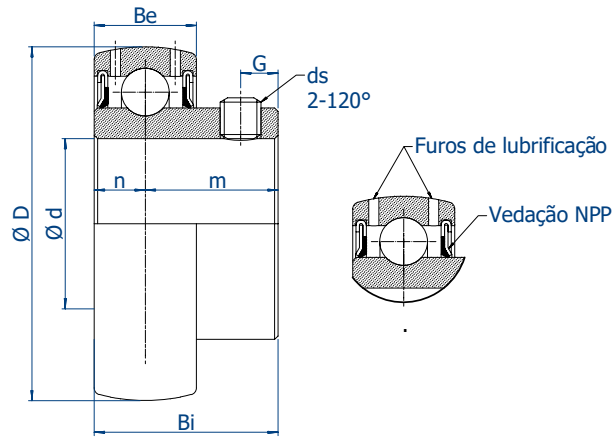


Ø Eixo mm pol.	Rolamento	Dimensões (mm)						ds (mm) (UNF)	Carga (Kgf)		Peso (Kg)
		D	Bi	n	m	Be	G		dinâmica Cr	estática Cor	
15 17	SSB 202 SSB 203	40	22,0	6,0	16,0	12	4,5	M6x1 1/4-28	970	490	0,10
3/4 20	SSB 204-12 SSB 204	47	25,0	7,0	18,0	14	5,5	M6x1 1/4-28	1310	680	0,15
25 1	SSB 205 SSB 205-16	52	27,0	7,5	19,5	15	5,5	M6x1 1/4-28	1430	800	0,20
30	SSB 206	62	30,0	8,0	22,0	16	6,0	M8x1 5/16-24	2000	1140	0,20
35	SSB 207	72	32,0	8,5	23,5	17	6,5	M8x1 5/16-24	2640	1550	0,40
40	SSB 208	80	34,0	9,0	25,0	18	7,0	M8x1 5/16-24	2990	1860	0,45
1-3/4 45	SSB 209-28 SSB 209	85	36,0	9,5	26,5	19	8,0	M8x1 5/16-24	3350	2120	0,50
50	SSB 210	90	43,4	11,0	32,4	20	9,5	M8x1 5/16-24	3600	2370	0,55
55	SSB 211	100	45,0	10,5	34,5	21	10,0	M10x1,25 3/8-24	4400	2980	0,58
60	SSB 212	110	49,7	11,0	38,7	22	10,0	M10x1,25 3/8-24	5350	3350	0,60





SSA 200

AÇO INOXIDÁVEL
Rolamento **ESFÉRICO**
Fixação por **COLAR EXCÊNTRICO**
Serviço **LEVE**





BRM

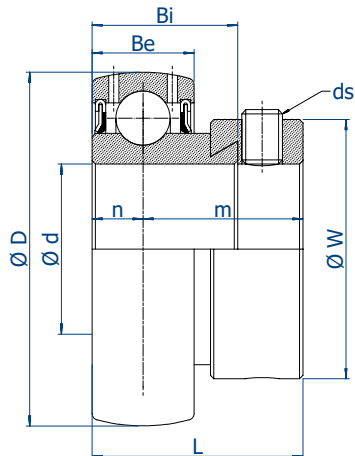


Ø Eixo mm pol.	Rolamento	Dimensões (mm)							ds (mm) (UNF)	Carga (Kgf)		Peso (Kg)
		D	L	Bi	Be	n	m	W		dinâmica Cr	estática Cor	
20	SSA 204	47	31,0	21,5	14	7,0	24,0	33,2	M6x1 1/4-28	990	665	0,15
25	SSA 205	52	31,0	21,5	15	7,5	23,5	37,5	M6x1 1/4-28	1080	788	0,20
30	SSA 206	62	35,8	23,8	16	8,0	27,8	44,5	M8x1 5/16-24	1500	1120	0,20
35	SSA 207	72	39,0	25,4	17	8,5	30,5	55,5	M8x1 5/16-24	1980	1520	0,40
40	SSA 208	80	43,8	29,9	18	9,0	34,8	60,0	M8x1 5/16-24	2230	1820	0,50

BRM

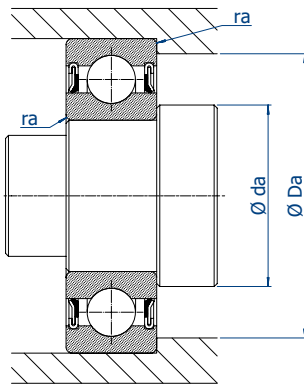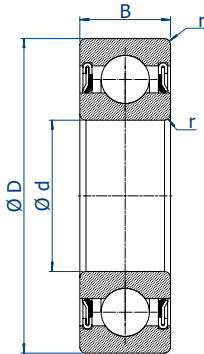

AÇO INOXIDÁVEL
Rolamento **CILÍNDRICO**
Fixação por **INTERFERÊNCIA**
Serviço **LEVE**



SS 6
SS 60
SS 62
SS 63



Ø Eixo mm	Rolamento	Dimensões (mm)						Carga (Kgf)		Rotação Máxima (rpm) Ajuste h7	Peso (Kg)
		D	B	r	da Min.	Da Max.	ra min.	dinâmica Cr	estática Cor		
5	SS625-2RS	16,0	5,0	0,3	7,0	14,0	0,3	125	50	36000	0,005
6	SS626-2RS	19,0	6,0	0,3	8,0	17,0	0,3	165	65	32000	0,008
7	SS627-2RS	22,0	7,0	0,3	9,0	20,0	0,3	235	100	30000	0,013
8	SS698-2RS	19,0	6,0	0,3	10,0	16,5	0,3	160	65	36000	0,007
	SS608-2RS (ZZ)	22,0	7,0	0,3	10,0	20,0	0,3	235	100	34000	0,012
	SS628-2RS	24,0	8,0	0,3	12,0	22,0	0,3	250	110	33000	0,018
9	SS609-2RS	24,0	7,0	0,3	11,0	22,0	0,3	240	100	32000	0,015
	SS629-2RS	26,0	8,0	0,3	11,0	24,0	0,3	325	140	28000	0,019
10	SS6000-2RS (ZZ)	26,0	8,0	0,3	12,0	24,0	0,3	350	195	17000	0,019
	SS6200-2RS	30,0	9,0	0,6	14,0	26,0	0,6	395	225	17000	0,019
	SS6300-2RS	35,0	11,0	0,6	14,0	31,0	0,6	500	227	17000	0,051
12	SS6001-2RS (ZZ)	28,0	8,0	0,3	14,0	26,0	0,3	395	225	17000	0,021
	SS6201-2RS (ZZ)	32,0	10,0	0,6	16,0	28,0	0,6	525	305	16000	0,036
	SS6301-2RS	37,0	12,0	1,0	17,0	32,0	1,0	594	276	16000	0,058
15	SS6902-2RS	28,0	7,0	0,3	17,0	26,0	0,3	300	150	17000	0,015
	SS6002-2RS	32,0	9,0	0,3	17,0	30,0	0,9	430	250	15000	0,029
	SS6202-2RS	35,0	11,0	0,6	19,0	31,0	0,6	590	350	15000	0,043
	SS6302-2RS	42,0	13,0	1,0	20,0	37,0	1,0	750	360	13000	0,081
17	SS6003-2RS	35,0	10,0	0,3	19,0	33,0	0,3	460	280	14000	0,037
	SS6203-2RS	40,0	12,0	0,6	21,0	36,0	0,6	735	450	13000	0,063
	SS6303-2RS	47,0	14,0	1,0	22,0	42,0	1,0	850	500	11000	0,110
20	SS6004-2RS	42,0	12,0	0,6	24,0	38,0	0,6	720	445	12000	0,065
	SS6204-2RS	47,0	14,0	1,0	25,0	42,0	1,0	990	620	11000	0,105
	SS6304-2RS	52,0	15,0	1,1	26,5	45,5	1,0	1053	700	10000	0,141
25	SS6005-2RS (ZZ)	47,0	12,0	0,6	29,0	43,0	0,6	775	500	10000	0,077
	SS6205-2RS	52,0	15,0	1,0	30,0	47,0	1,0	1080	700	9500	0,125
	SS6305-2RS	62,0	17,0	1,1	31,5	55,5	1,0	1360	750	8000	0,230
30	SS6006-2RS	55,0	13,0	1,0	35,0	50,0	1,0	1020	690	9000	0,115
	SS6206-2RS	62,0	16,0	1,0	35,0	57,0	1,0	1500	1005	8000	0,192
	SS6306-2RS	72,0	19,0	1,1	36,5	65,5	1,0	1800	1100	6700	0,340
35	SS6007-2RS	62,0	14,0	1,0	40,0	57,0	1,0	1140	735	6700	0,147
	SS6207-2RS	72,0	17,0	1,1	41,5	65,5	1,1	1975	1365	6300	0,288
40	SS6008-2RS	68,0	15,0	1,0	45,0	63,0	1,0	1200	800	6000	0,186
	SS6208-2RS	80,0	18,0	1,1	46,5	73,5	1,1	2270	1595	5600	0,366
	SS6308-2RS	90,0	23,0	1,5	48	82,0	1,5	2600	1650	5300	0,620
45	SS6009-2RS	75,0	16,0	1,0	50,0	70,0	1,0	1400	1100	5300	0,236
	SS6209-2RS	85,0	19,0	1,1	51,5	78,5	1,1	2435	1770	5300	0,405
50	SS6010-2RS	80,0	16,0	1,0	55,0	75,0	1,0	1430	1105	4800	0,256
	SS6210-2RS	90,0	20,0	1,1	56,5	83,5	1,1	2790	1880	5000	0,453
55	SS6011-2RS	90,0	18,0	1,1	61,5	83,5	1,0	1875	1400	4500	0,373
	SS6211-2RS	100,0	21,0	1,5	63,0	92,0	1,5	2800	1900	4300	0,600
60	SS6212-2RS	110,0	22,0	1,5	68,0	102,0	1,5	3400	2400	3800	0,760
65	SS6013-2RS	100,0	18,0	1,1	71,5	93,5	1,0	2000	1670	4000	0,430
70	SS6014-RS	110,0	20,0	1,1	76,5	103,5	1,0	2535	2050	3600	0,600